



Jet-A-Mark®

8000+ SERIES PRINTHEADS | Drop-on-Demand® Ink-Jet

Our new 8000+ Series Printhead is the most reliable drop-on-demand technologies in the industry, due to its unique design and impressive quality. The exclusive micro-valve technology provides for tremendous reliability, easy maintenance, and dramatically lower ink consumption, while maintaining impressive print quality and speed.

The 8000+ heads offer a choice of 7, 16, and 32 valves per head with three nozzle options: mini, midi, and maxi, to meet any large character marking requirements. Printheads can be stacked for printing large graphics. Flexible mounting over, under, or beside the production line allows for seamless integration. Precision jewels set in the 8000+ stainless steel faceplate provide dramatically lower ink consumption, for a lower cost per mark.



- 6 billion cycles before tuning, outlasting the competition
- Handles non-porous ink without typical clogging issues
- Performs well with inks formulated with aggressive fast-dry solvents
- Fast start-up without purging, and easy color change over
- Wide assortment of inks to match a variety of applications

[Ink-Jet Printing](#) | [Contact Printing](#) | [Indenting](#) | [Etching](#) | [Laser](#) | [Inks](#) | [Integrated Solutions](#) | [Software](#)

For more info, please contact:
Presa NV, Brusselsesteenweg 558, 3090 Overijse, Belgium.
Phone +32 2 657 02 22
E-mail: marketing@presa.com
Web: www.presatendeur.eu

Matthews Marking



Systems



Matthews™
BRAND SOLUTIONS

 **presatendeur**
ALONG YOUR LINES

Drop-On-Demand

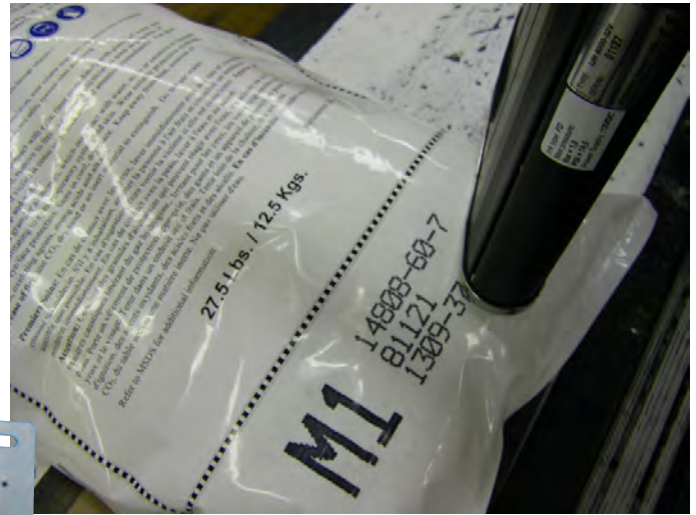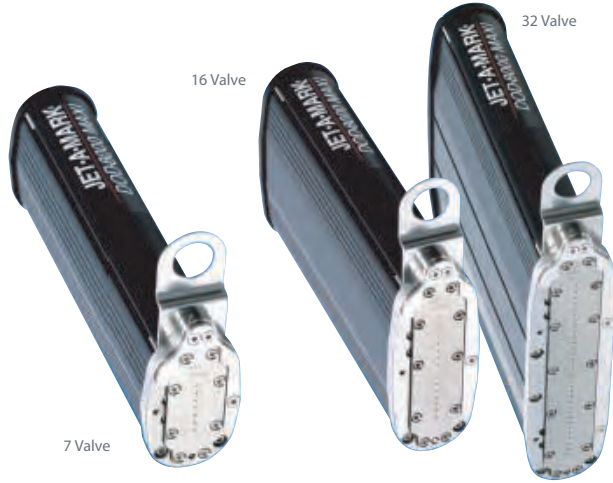

Washdown (IP65 rated), 7 Valve

8000+ Series Printheads

	Printhead Type	Min. Char. Size	Max. Char. Size	Max. Speed ⁽¹⁾	Max. Print Distance ⁽³⁾	3-Way Valve ⁽⁵⁾	Dimensions
8000+ Maxi	7-Valve	1/4" (6.35 mm)	1 1/4" (31.75 mm)	780 fpm ⁽¹⁾ /3.96 mps	1/2" (12.7mm)		7.52"L x 1.68"W x 4.84"H (191 x 42.7 x 123 mm)
	16-Valve	1/4" (6.35 mm)	2 1/2" (63.5 mm)	780 fpm ⁽¹⁾ /3.96 mps	1/2" (12.7mm)	Yes	7.48"L x 1.73"W x 6.26"H (190 x 44 x 159 mm)
	32-Valve	1/4" (6.35 mm)	5" (127 mm)	780 fpm ⁽¹⁾ /3.96 mps	1/2" (12.7mm)	Yes	7.48"L x 1.73"W x 8.80"H (190 x 44 x 223.4 mm)
8000+ Midi	7-Valve	3/16" (4.76 mm)	1 1/4" (31.75 mm)	400 fpm ⁽²⁾ /2.03 mps	1/2" (12.7mm)		7.52"L x 1.68"W x 4.84"H (191 x 42.7 x 123 mm)
	16-Valve	3/16" (4.76 mm)	2 1/2" (63.5 mm)	400 fpm ⁽²⁾ /2.03 mps	1/2" (12.7mm)	Yes	7.48"L x 1.73"W x 6.26"H (190 x 44 x 159 mm)
	32-Valve	3/16" (4.76 mm)	5" (127 mm)	400 fpm ⁽²⁾ /2.03 mps	1/2" (12.7mm)	Yes	7.48"L x 1.73"W x 8.80"H (190 x 44 x 223.4 mm)
8000+ Mini IP65 7-VALVE PRINTHEAD (4) AVAILABLE FOR WASHDOWN APPLICATIONS	7-Valve	3/32" (2.38 mm)	1 1/4" (31.75 mm)	400 fpm ⁽²⁾ /2.03 mps	1/4" (6.357mm)		7.52"L x 1.68"W x 4.84"H (191 x 42.7 x 123 mm)
	16-Valve	3/32" (2.38 mm)	2 1/2" (63.5 mm)	400 fpm ⁽²⁾ /2.03 mps	1/4" (6.357mm)	Yes	7.48"L x 1.73"W x 6.26"H (190 x 44 x 159 mm)
	32-Valve	3/32" (2.38 mm)	5" (127 mm)	400 fpm ⁽²⁾ /2.03 mps	1/4" (6.357mm)	Yes	7.48"L x 1.73"W x 8.80"H (190 x 44 x 223.4 mm)
Controllers	8400e, R44e, SX32e, V84e, V84i						
Inks	Water Based, Water Fast, Alcohol (n-propylene, isopropylene, ethanol), Ethyl Acetate, MEK, Acetone, Pigmented						

(1) At 1.8 mm spacing (2) At 1.0 mm spacing (3) At <200 fpm (4) IP65 3.4" Dia. x 5.2" L (87.5 x 132.0 mm)

(5) Unique 3-way valve enables you to quickly purge solvent, minimizing maintenance and downtime



Matthews Marking

Systems

For more info, please contact:

Presa NV, Brusselssesteenweg 558, 3090 Overijse, Belgium.

Phone +32 2 657 02 22

E-mail: marketing@presa.com

Web: www.presatendeur.eu

Distributed and sold worldwide | www.matthewsmarking.com

Matthews Marking Systems continually improves products, therefore the right is reserved to alter the design and/or specifications without giving prior notice.

© 2013 Matthews Marking Systems